


## Helena tilslutningsmuligheder

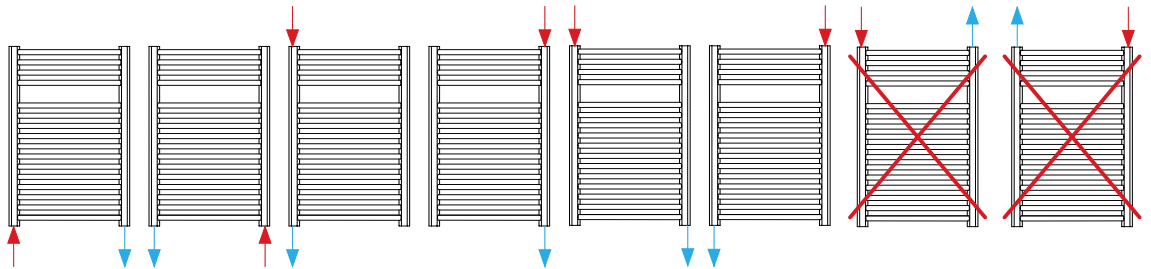

## Helena ydelsestabel

Beregningfaktor  
per meter radiator  
ved 75/65/20 °C  
i henhold til EN442  
Ligning:  $\phi = K_M \times \Delta T^n$

Længde	Højde	Hvid RAL 9016		Krom	
		Plan	Buet	Plan	Buet
420	700	199	199	133	133
		130	130	86	86
		313	313	211	211
	900	233	233	159	159
		149	149	103	103
		375	375	252	252
1200	312	312	206	206	
	202	202	132	132	
	494	494	328	328	
500	764	233	233	159	159
		149	149	103	103
		373	373	251	251
	1172	357	357	235	235
		232	232	151	151
		563	563	373	373
1750	524	524	340	340	
	343	343	220	220	
	821	821	541	541	
600	764	276	276	186	186
		179	179	121	121
		438	438	293	293
	1172	421	421	275	275
		275	275	178	178
		662	662	436	436
1750	615	615	398	398	
	403	403	257	257	
	964	964	632	632	
750	764	342	342	226	226
		226	226	148	148
		533	533	356	356
	1172	514	514	336	336
		337	337	219	219
		806	806	528	528
1750	749	749	482	482	
	490	490	311	311	
	1.174	1.174	766	766	

EN442 (W) 70/40/20°C

EN442 (W) 60/30/20°C

EN442 (W) 75/65/20°C

Varmeydelse i Watt i henhold til EN 442