


Compact Planar Plinth tilslutningsmuligheder

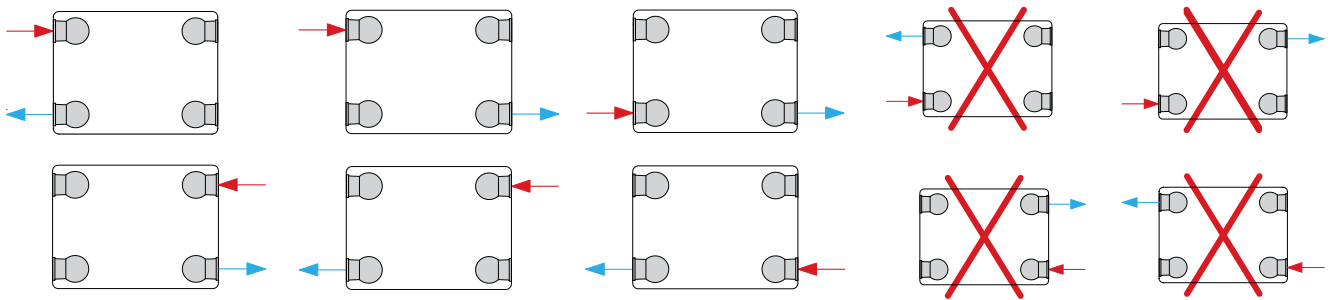

Compact Planar Plinth ydelsestabel

Beregningfaktor
per meter radiator
ved 75/65/20 °C
i henhold til EN442
Ligning: $\phi = K_M \times \Delta T^n$

Højde	200		
Type	22	33	44
1000	390	582	755
	255	379	489
	611	918	1.197
1100	429	640	831
	280	417	538
	716	1.026	1.333
1200	468	699	906
	306	455	587
	733	1.102	1.436
1300	507	757	982
	331	493	636
	794	1.193	1.556
1400	545	815	1.057
	357	530	685
	855	1.285	1.676
1500	584	873	1.133
	382	568	734
	917	1.377	1.796
1600	623	932	1.208
	408	606	782
	978	1.469	1.915
1700	662	990	1.284
	433	644	831
	1.039	1.561	2.035
1800	737	1.059	1.371
	459	682	880
	1.100	1.652	2.155
1900	740	1.106	1.435
	484	720	929
	1.161	1.744	2.274
2000	779	1.164	1.510
	510	758	978
	1.222	1.836	2.394

Højde	200		
Type	22	33	44
2100	818	1.223	1.586
	535	796	1.027
	1.283	1.928	2.514
2200	857	1.281	1.661
	561	834	1.076
	1.344	2.020	2.633
2300	896	1.339	1.737
	586	871	1.125
	1.405	2.111	2.753
2400	935	1.397	1.812
	612	909	1.174
	1.466	2.203	2.873
2500	974	1.455	1.888
	637	947	1.223
	1.528	2.295	2.993
2600	1.013	1.514	1.963
	663	985	1.271
	1.589	2.387	3.112
2700	1.052	1.572	2.039
	688	1.023	1.320
	1.650	2.479	3.232
2800	1.091	1.630	2.114
	714	1.061	1.369
	1.711	2.570	3.352
2900	1.130	1.688	2.190
	739	1.099	1.418
	1.772	2.662	3.471
3000	1.169	1.747	2.265
	765	1.137	1.467
	1.833	2.754	3.591

EN442 (W) 70/40/20°C

EN442 (W) 60/30/20°C

EN442 (W) 75/65/20°C