


## Compact Planar Plinth tilslutningsmuligheder

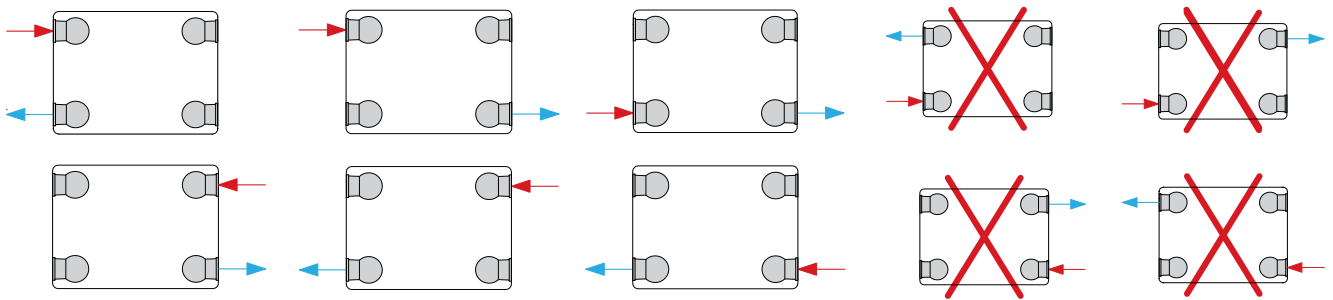

## Compact Planar Plinth ydelsestabel

Beregningfaktor  
per meter radiator  
ved 75/65/20 °C  
i henhold til EN442  
Ligning:  $\phi = K_M \times \Delta T^m$

EN442 (W) 70/50/20°C  
EN442 (W) 55/45/20°C  
EN442 (W) 75/65/20°C

Højde	200			Højde
Type	22	33	44	Type
<b>1000</b>	461	690	897	<b>1000</b>
	321	478	619	
	611	918	1.197	
<b>1200</b>	553	829	1.076	<b>1200</b>
	385	574	742	
	733	1.102	1.436	
<b>1400</b>	645	966	1.256	<b>1400</b>
	449	669	866	
	855	1.285	1.676	
<b>1600</b>	738	1.105	1.436	<b>1600</b>
	513	765	990	
	978	1.469	1.915	
<b>1800</b>	830	1.242	1.615	<b>1800</b>
	578	861	1.114	
	1.100	1.652	2.155	
<b>2000</b>	922	1.381	1.795	<b>2000</b>
	642	956	1.238	
	1.222	1.836	2.394	
<b>2200</b>	1.014	1.519	1.974	<b>2200</b>
	706	1.052	1.361	
	1.344	2.020	2.633	
<b>2400</b>	1.106	1.657	2.154	<b>2400</b>
	770	1.148	1.485	
	1.466	2.203	2.873	
<b>2600</b>	1.199	1.795	2.333	<b>2600</b>
	834	1.243	1.609	
	1.589	2.387	3.112	
<b>2800</b>	1.291	1.933	2.512	<b>2800</b>
	898	1.338	1.732	
	1.711	2.570	3.351	
<b>3000</b>	1.383	2.071	2.691	<b>3000</b>
	962	1.433	1.855	
	1.833	2.753	3.590	

Varmeydelse i Watt i henhold til EN 442